



### Special Features

- Simple and compact design.
- High operating pressure up to 50 bar.
- Over pressure safe from either side to maximum working pressure.
- Indicating mechanism isolated from pressure chamber.
- Suitable for Air / Gas media.

### Application

- Filters
- Hydraulic systems
- Water treatment plants
- Chemical plants
- Natural gas processing
- Heat exchanger
- Gasoline / diesel engine filters
- Pumps
- Valves
- Compressors

Note: The scale shown in the photograph is custom made. Standard scale will be without color bands.

### Specifications

#### Standard Version : 63 mm, 100 mm & 150 mm

Accuracy	: ± 2% of F. S. (For ascending order)
Ambient temperature	: Max. 65°C
Process temperature	: Max. 80°C
Static pressure (on request)	: 10 kg/cm <sup>2</sup> up to ranges 4 bar 16 kg/cm <sup>2</sup> for ranges above 4 bar
Over pressure range	: Up to the Full Scale Value
Connection	: 1/4" NPT (F) x 2 Nos.

Case	: AISI 304 SS
Wetted parts	: Teflon, Ceramic Magnet & SS Spring
Body	: AISI 316 SS
Protection	: IP 65
Dial	: Aluminum, black Colored, Fixed
Window	: Plexi Glass


#### Glycerine filled version (option PY)

Accuracy	: ±4.0% of F. S. (For ascending order)
Ambient temperature	: Maximum 65°C
Process temperature	: Maximum 65°C
Window	: Plexi Glass
Dampening liquids	: Glycerin 99.7% (others available as option)
Other features	: Refer Specification of Standard Version

#### Temperature effect :

The variation of indication caused by effects of temperature is to be calculated by below formula; which is to be added in the specified accuracy while measurement :- Formula :  $\pm 0.04 \times (t_2 - t_1) \% \text{ of F. S.}$  where  $t_1$  = reference temperature (+20°C) and  $t_2$  = ambient temperature in °C.


### Operating Principle

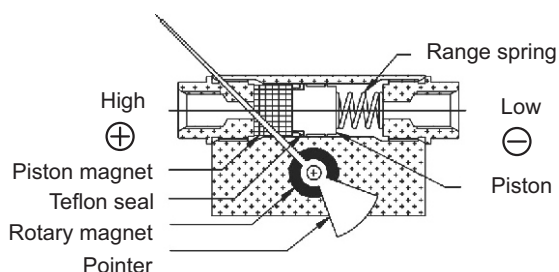


High and Low pressures are separated by a sensor assembly consisting of a magnet, piston, Teflon seal and a range spring. The difference in pressure causes the sensor assembly to move in proportion to the change against a range spring.

A rotary magnet, located in a separate body cavity and isolated from the acting pressures, is rotated by magnetic coupling as per the linear movement of the sensor assembly. A pointer attached to the rotary magnet indicates differential pressure on the dial.


**Dimensions - standard version**

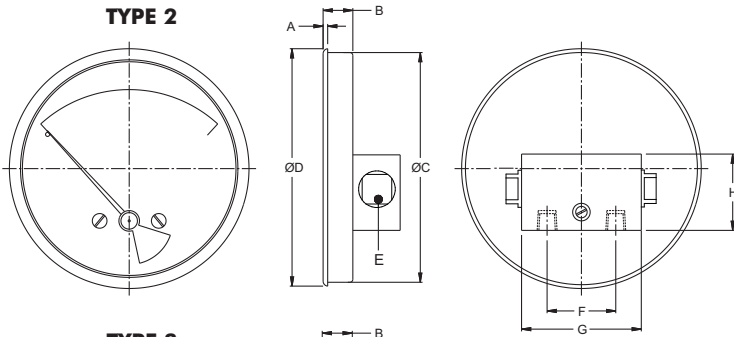


NS	A	B	ØC	ØD	E	F	G	H	Weight in gram (With Box)
63	3.2	19.5	62.5	66.5	20	54	76	50	430
100	3.2	19.5	101.5	104	20	54	76	50	460
150	3.2	19.5	151.5	155.5	20	54	76	50	560

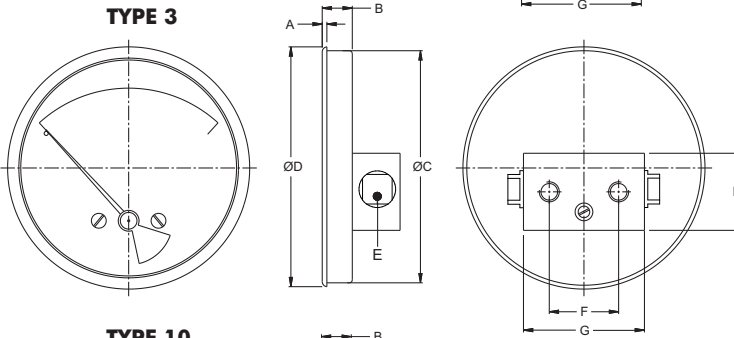

NS	A	B	ØC	ØD	E	F	G	H	Weight in gram (With Box)
63	3.2	19.5	62.5	66.5	20	54	76	50	400
100	3.2	19.5	101.5	104	20	54	76	50	450
150	3.2	19.5	151.5	155.5	20	54	76	50	540

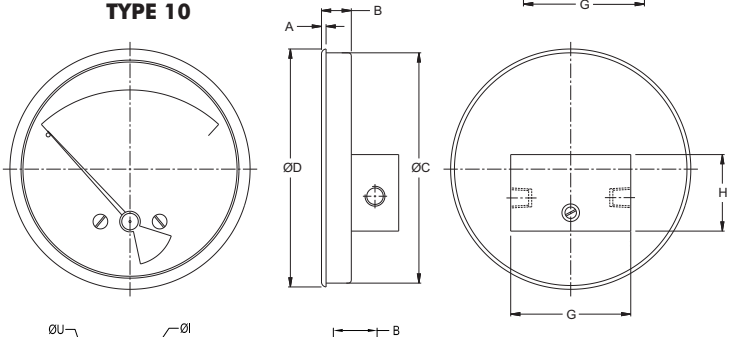

NS	A	B	ØC	ØD	G	H	Weight in gram (With Box)
63	3.2	19.5	62.5	66.5	76	50	410
100	3.2	19.5	101.5	104	76	50	460
150	3.2	19.5	151.5	155.5	76	50	550

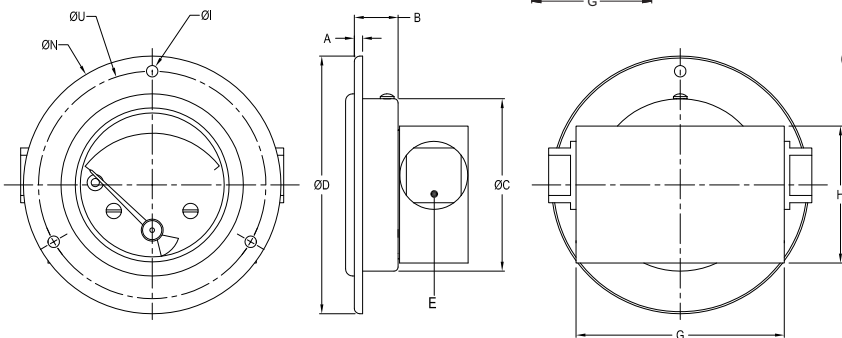

**Case with Front Flange Dimensions**

NS	A	B	ØC	ØD	E	G	H	ØN	ØU	ØI	Weight in gram (With Box)
63	3.2	19.5	62.5	66.5	20	76	50	94	83	4.2	460
100	3.2	19.5	101.5	104	20	76	50	131	121	4.2	490
150	3.2	19.5	151.5	155.5	20	76	50	181	170	4.2	600

Notes : • Drawings are not to scale. • All Dimensions are in mm. • NS = Nominal Size.

**Range Table**

Note : We offer National / International Scales like kPa, bar, psi, kg/cm<sup>2</sup>, mbar, mmWC, inWC or Equivalent scales as per the requirement can be provided on request. Following are the example tables for kPa & kg/cm<sup>2</sup>

**Gauge Pressure Range**

Single scale					
kPa	kPa	kPa	kg/cm <sup>2</sup>	kg/cm <sup>2</sup>	kg/cm <sup>2</sup>
0 / 100	0 / 300	0 / 600	0 / 1.00	0 / 3.00	0 / 6.00
0 / 160	0 / 350	0 / 700	0 / 1.60	0 / 3.50	0 / 7.00
0 / 200	0 / 400	0 / 900	0 / 2.00	0 / 4.00	0 / 9.00
0 / 250	0 / 500	0 / 1000	0 / 2.50	0 / 5.00	0 / 10.00

Note : Other Scales are available on customer request.

How To Order				Example
<b>Basic Model</b>				
<b>Code</b>				BF
<b>Nominal Size</b>	<b>D</b>	<b>F</b>	<b>H</b>	X
	63 mm	100 mm	150 mm	
<b>Case Type</b>				
<b>HN</b> Case without front flange	<b>HO</b> Case with front flange			XX
<b>Mounting</b>				
<b>2</b> Direct bottom entry	<b>3</b> Direct back entry	<b>10</b> In line entry		X OR XX
<b>Body Material</b>				
<b>HU</b> Aluminium	<b>CL</b> AISI 316 SS	<b>CN</b> Monel		XX
<b>Gauge Connection</b>				
<b>2NF</b> 1/4" NPT (F) X 2 Nos. (Standard)	<b>2BF</b> 1/4" BSP (F) X 2 Nos.			XXX
<b>Mounting</b>				0/2 kg/cm <sup>2</sup>
Note : Connections like Metric/ PT/ PF/ Flaired/ UNF/ G/ R etc. can be provided on request.				
<b>Range</b>				
Refer range table				
<b>Options</b>				
<b>RH</b> Custom designed dial				
<b>SW</b> Dial tag marking				
<b>SX</b> SS tag plate				
<b>NG</b> Calibration certificate				
<b>PY</b> Dampening liquid glycerine filled				
<b>JU</b> 2" pipe/yoke mounting bracket & 'U' clamp (AISI 304 SS)				XX

**Ordering Example: BF . X . XX . XX . XXX . X OR XX . XX . XX . XX . 0/2 kg/cm<sup>2</sup> . XX . XX**

For other optional items, please contact factory for delivery and minimum quantity of order.

Note : Specifications and dimensions given in this product catalogue represents the state of engineering at the time of printing .  
Modifications may take place and materials specified may be replaced by others without prior notice.