


Special Features


- Air vent hole for drain
- Working pressure up to 100 kg/cm²
- Working pressure up to 180 kg/cm²
- Backelite cover on operating
- Lever (handle)

Application

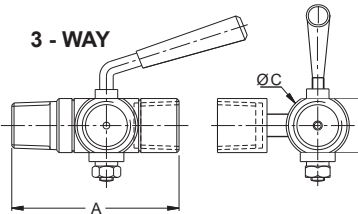
- Hydraulic machines
- Compressors
- Process plants
- Clean air
- Gases
- Non crystallized liquids

Specifications
Standard Version

Body Handle	:	AISI 316 SS
	:	AISI 304 SS with
Working pressure	:	Backelite cover
Working temperature	:	100 kg/cm ²
Gasket	:	Up to 180°C PTFE
seal Connection	:	1/2" BSP (F x F) For 2 - Way
	:	1/2" BSP (M x F x F) For 3 - Way

Dimensions - Standard Version
2 - WAY


Size	A			B	ØC
	F x F	M x F	M x M		
1/4"	50	55	60	19	22
3/8"	55	60	65	25	28
1/2"	60	65	70	25	28

3 - WAY


Size	A		B	ØC
	M x F x F			
1/4"	70		19	22
3/8"	75		25	28
1/2"	80		25	28

Notes : • Drawings are not to scale. • All Dimensions are in mm.

How To Order
Basic Model
Code

Type	KS	2 - WAY	KU	3 - WAY
Body	CL	AISI 316 SS (Standard)	CQ	AISI 304 SS

2 Way - size & end connection [inlet x outlet] (* Standard)

2BF.2BF	1/4" BSP (F x F)*	3BM.3BM	3/8" BSP (M x M)	2NF.2NF	1/4" NPT (F x F)*	3NM.3NM	3/8" NPT (M x M)
2BM.2BF	1/4" BSP (M x F)	4BF.4BF	1/2" BSP (F x F)*	2NM.2NF	1/4" NPT (M x F)	4NF.4NF	1/2" NPT (F x F)*
2BM.2BM	1/4" BSP (M x M)	4BM.4BF	1/2" BSP (M x F)	2NM.2NM	1/4" NPT (M x M)	4NM.4NF	1/2" NPT (M x F)
3BF.3BF	3/8" BSP (F x F)*	4BM.4BM	1/2" BSP (M x M)	3NF.3NF	3/8" NPT (F x F)*	4NM.4NM	1/2" NPT (M x M)
3BM.3BF	3/8" BSP (M x F)			3NM.3NF	3/8" NPT (M x F)		

3 Way - size & end connection [inlet x outlet x outlet]

2BM.2BF.2BF	1/4" BSP (M x F x F)*	2NM.2NF.2NF	1/4" NPT (M x F x F)*	4BM.4BF.4BF	1/2" BSP (M x F x F)
3BM.3BF.3BF	3/8" BSP (M x F x F)	3NM.3NF.3NF	3/8" NPT (M x F x F)	4NM.4NF.4NF	1/2" NPT (M x F x F)

Optional extras For other optional items, please contact factory for delivery and minimum quantity of order.

SG Oxygen service	GH Material test certificates*
GI Threaded hex plug for vent hole	TF Conformity as per NACE Standard

* Material test certificates will be provided for wetted parts only with chemical composition testing. For others, please consult factory.

Ordering Example: EC . XX . XX . XXX.XXX OR XXX.XXX.XXX . XX

Note : Specifications and dimensions given in this product catalogue represents the state of engineering at the time of printing.

Modifications may take place and materials specified may be replaced by others without prior notice.

Example

EC

XX

XX

XXX.XXX

OR

XXX.XXX.

XXX

XX